



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>6</sup> : <b>H04L 1/12, 27/34, H04B 7/005</b>		<b>A1</b>	(11) International Publication Number: <b>WO 99/20016</b>
			(43) International Publication Date: 22 April 1999 (22.04.99)
(21) International Application Number: <b>PCT/US98/21854</b>		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 14 October 1998 (14.10.98)			
(30) Priority Data: 08/950,028 14 October 1997 (14.10.97) US			
(71) Applicant (for all designated States except US): WINNET MCS, INC. [US/US]; 635 Vaqueros Avenue, Sunnyvale, CA 94086 (US).			
(72) Inventor; and			
(75) Inventor/Applicant (for US only): LE-NGOC, Tho [CA/CA]; 8221 Du Mail, Anjou, Quebec H1K 125 (CA).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(74) Agents: HAVERSTOCK, Thomas, B. et al.; Haverstock & Owens LLP, Suite 420, 260 Sheridan Avenue, Palo Alto, CA 94306 (US).			

(54) Title: METHOD AND APPARATUS FOR MAINTAINING A PREDEFINED TRANSMISSION QUALITY IN A WIRELESS MAN NETWORK

## (57) Abstract

A technique for maintaining a predefined transmission quality in a wireless Metropolitan Area Network (MAN). Each of a plurality of Local Area Networks are coupled to a corresponding router. Each router is coupled to one or more transceivers for interconnecting the routers via wireless links. Each router stores a table representative of the topology of the MAN and receives detected indicia representative of the quality of the wireless links and representative of network traffic loads. The router adapts the manner of transmission and the path of transmission according to the indicia. As a result, the MAN is highly efficient, in terms of cost, power and bandwidth utilisation. For

example, a strength of a signal received over a wireless communication link is periodically monitored for maintaining the strength within a predefined range by adjusting the transmission power. In addition, an error rate for the data received over the link is monitored. If the received signal strength remains below the predefined range despite the transmit power having been adjusted to a maximum allowable level, and if the error rate approaches a predefined limit, one or more techniques are selectively employed to reduce the error rate while maintaining a sufficiently high network throughput. The adaptive techniques include changing the data rate, modulation level, error correction coding, and spectrum spreading. In addition, a path for the data is preferably selected according to an Open-Shortest-Path-First algorithm, though one or more alternate paths can be selected for transmitting at least a portion of the data.

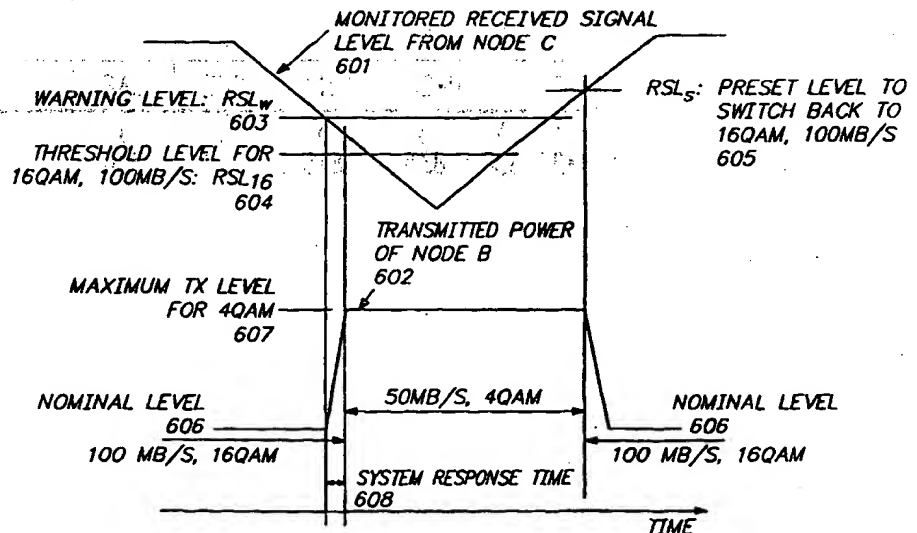

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## METHOD AND APPARATUS FOR MAINTAINING A PREDEFINED TRANSMISSION QUALITY IN A WIRELESS MAN NETWORK

5      Field of the Invention:

The invention relates to a wireless network for a metropolitan area. More particularly, the invention relates to a technique for maintaining a predefined transmission link quality in a wireless network for a metropolitan area.

10      Background of the Invention:

Computers utilized in modern office environments are typically coupled to a local area network (LAN). The LAN allow users of the computers to share common resources, such as a common printer included in the network, and allows the users to share information files, such as by including one or more file servers in the network. In addition, the users are typically able to communicate information with each other through electronic messaging. A commonly utilized type of LAN is Ethernet. Currently, a variety of products which support Ethernet are commercially available from a variety of sources.

Business organizations and their affiliates are often spread over several sites in a metropolitan or geographical area. For example, a business organization can have a headquarters, one or more branch offices, and various other facilities. For such business organizations, LANs located at the various sites will generally need to communicate information with each other. Wireless communication links for connecting local area networks are known. For example, U.S. Patent No. 4,876,742, entitled "Apparatus and Method for Providing a Wireless Link Between Two Area Network Systems," and U.S. Patent No. 5,436,902, entitled "Ethernet Extender," each disclose a wireless communication link for connecting LANs.

Availability of a wireless link is commonly expressed as the percentage of the time during which the bit error rate representing the performance of the link is lower than a given threshold level. Environmental precipitation causes a severe attenuation of the transmitted signal, especially for links operating in millimeter frequency bands. For example, to maintain an availability of 99.99% in the presence of environmental

precipitation, the signal must be transmitted at a level as high as 24 dB/km higher than otherwise. Therefore, to ensure an acceptable data error rate under all expected conditions, data is typically communicated over a wireless communication link at a relatively high power and at a relatively low rate. The amount of data required to be communicated over the wireless link, however, can vary widely over time and can vary independently of environmental conditions. In addition, wireless links, especially those operated at high power levels, can cause interference with other wireless links operating in the same geographical area.

Therefore, what is needed is a technique for maintaining a predefined transmission quality while transmitting data over a wireless communication link in a metropolitan area network (MAN). What is further needed is a technique for transmitting data over a wireless communication link in a MAN at a rate sufficient to keep up with demand. What is still further needed is a technique for transmitting data over a wireless communication link in a MAN at a relatively low power. What is additionally needed is a technique for reducing interference between wireless communication links operating in the same geographical area.

#### Summary of the Invention:

The invention is a method and apparatus for maintaining a predefined transmission quality for transmitting data in a wireless metropolitan area network (MAN). Each of a plurality of local area networks (LANs) are coupled to a corresponding router. Each router is coupled to one or more transceivers for interconnecting the routers via wireless communication links, thus forming the MAN. Data for communication over the MAN is generated by a user or application at a source node in a source LAN and is communicated to a source router coupled to the source LAN. The data is used to modulate a carrier signal. A transceiver for the source router transmits the modulated signal along a path of one or more wireless communication links to a receiver of a destination router for the data. If the path includes more than one wireless link, one or more intermediate routers will receive and retransmit the modulated signal along the path. The destination router demodulates the signal and communicates the data to a destination node within a destination LAN.

Each router is coupled to one or more of the wireless links over which the router can selectively transmit data. In addition, each router stores a table representative of the topology of the entire MAN. Each router receives detected indicia representative of the transmission quality of wireless links in the MAN and detected indicia representative of network demand. Based upon the stored topology and detected indicia, each router determines a manner in which data is to be transmitted over a selected one of the corresponding wireless links.

In contrast to conventional wireless communications, the present invention maintains an overall availability of 99.99% or better by adapting the manner of transmission and the path of transmission to environmental and other conditions (by detecting transmission quality) and to demand placed upon the network (by detecting traffic loads) and by reliance upon the delay tolerant nature of packet switched communications. As a result, a MAN can be constructed according to the present invention that is highly efficient, in terms of cost, power and bandwidth utilization in order to achieve larger coverage and higher network density.

An example is provided of adapting the manner of transmission to detected transmission quality. The strength of the signal received over each wireless communication link is periodically monitored to determine whether the received signal strength is within a predefined range. If the signal strength falls outside the range, the power at which the modulated signal is transmitted is adjusted to return the signal strength to the range. In addition, the error rate for data received over each link is monitored.

If the received signal strength for a communication link remains below the predefined range, despite the transmit power having been adjusted to a maximum allowable level, and if the error rate for data received over the wireless link approaches or exceeds a predefined limit, one or more techniques are employed to reduce the error rate while maintaining a sufficiently high network throughput. A first technique for reducing the error rate is to reduce a rate at which data is communicated along a path. A second technique for reducing the error rate is to alter a modulation level of transmitted signal along the path. A third technique for reducing the error rate is to alter an error correction coding scheme employed for data communicated along the path. A fourth technique is to utilize spectrum spreading for communicating the data along the path.

Each of these techniques for reducing the error rate for data communicated along a communication path is dynamically utilized, singly or in combination, for maintaining an error rate for the data below the predefined limit while maintaining sufficient data communication bandwidth to keep up with demand placed upon the MAN. By transmitting data over each link at a relatively low power, and by utilizing error correction coding and spectrum spreading, interference between links is kept to a minimum, allowing for a high network density in the MAN.

In addition, the amount of data communicated over each link is also monitored. The communication path is preferably selected according to an Open-Shortest-Path-First (OSPF) algorithm. If the shortest path does not have sufficient available bandwidth or results in an excessive error rate, a technique for reducing the error rate and for increasing the amount of data communicated is to select one or more alternate paths for communicating at least a portion of the data. Preferably, the alternate paths are selected to be the next shortest available paths.

#### Brief Description of the Drawings:

Fig. 1 illustrates a schematic representation of a metropolitan area in which the present invention forms a metropolitan area network (MAN).

Figs. 2A-F illustrate representative MAN topologies according to the present invention.

Fig. 3 illustrates a functional block diagram of a router according to the present invention coupled to a local area network (LAN).

Fig. 4 illustrates a functional block diagram of an outer system according to the present invention including a radio frequency transceiver.

Figs. 5 illustrates a flow diagram according to the present invention for maintaining transmission quality in a wireless link.

Fig. 6 illustrates the timing relationship between the monitored RSL and transmitted power of the operation corresponding to the flow diagram of Fig. 5 during a period of heavy rain fade.

Detailed Description of a Preferred Embodiment

Fig. 1 illustrates an example of a metropolitan area 100 in which the present invention forms a metropolitan area network (MAN). Located within a geographical or metropolitan area 100 are several sites 102-118. Each site 102-118 can be an office building, an industrial park, a manufacturing facility, a business headquarters, a branch office, a warehouse, or other facility. Each site 102-118 has one or more local area networks (LANs) located within the site 102-118. A router 300 (Fig. 3) according to the present invention is coupled to each LAN while one or more outer systems 400 (Fig. 4) according to the present invention are coupled to each router 300. The routers 300 are preferably located in wiring closets of the sites 102-118 in order to facilitate connection of the routers 300 to the LANs. The outer systems 400 each include a wireless transceiver for communicating data among the sites 102-118. Each outer system 400 is preferably located within a housing 102A-118A on rooftops of the sites 102-118.

Together, each router 300 and associated outer unit(s) 400 form a node of the MAN. The nodes are interconnected by wireless communication links. Multiple simultaneous communication links to a node can be achieved by providing multiple outer systems 400 for a site. Though nine sites 102-118 are illustrated in Fig. 1, it will be understood that the MAN can include more or less sites depending upon the geography of the metropolitan area 100 and upon the number of LANs to be interconnected. Thus, data originating from a node of a LAN located in one of the sites 102-118 can be communicated to other nodes in other ones of the sites 102-118 over the MAN. While the present invention is preferably configured for a metropolitan area, it will be appreciated that under certain circumstances, the network can be scaled to a larger or smaller region. For example, the present invention could be applied as between two or more metropolitan areas, or could be applied to smaller geographical regions, such a college or business campus. In addition, one or more of the sites can be configured to communicate data with a geo-synchronous satellite. In such case, the satellite can form a repeater for interconnecting remotely located MANs via satellite links. In such case, the satellite links can operate according to the present invention or according to known techniques.

Figs. 2A-F illustrate representative MAN topologies according to the present invention for interconnecting nodes A-E. Fig. 2A illustrates the simplest system with a

point-to-point topology for interconnecting nodes A and B. Fig. 2B illustrates a linear topology for interconnecting nodes A-D. Fig. 2C illustrates a ring topology for interconnecting the nodes A-D. Fig. 2D illustrates a ring topology for interconnecting nodes A-D with a cross-link between nodes B and D. Fig. 2E illustrates a star topology for interconnecting the nodes A-E. Fig. 2F illustrates a star topology for interconnecting the nodes A-E with nodes B-E also interconnected in a ring topology. It will be apparent that additional topologies can be constructed according to the present invention for interconnecting any number of nodes based upon the topologies illustrated in Figs. 2A-F and that other topologies besides those illustrated can be constructed according to the present invention.

In general, by providing a large number of links relative to the number of nodes, the capacity and reliability of the MAN is increased though its cost is also increased. For example, the topology illustrated in Fig. 2B requires a minimum number of links for connecting the nodes A-D, thus the topology of Fig. 2B can be constructed at a minimum cost. Note, however, that in Fig. 2B data communicated between nodes A and D must pass through nodes B and C. Thus, data communication will tend to concentrate in the link between nodes B and C, limiting the total network capacity. Further, there are no alternate communication paths that can be utilized to avoid a communication link that is degraded due to environmental precipitation or to avoid a link that is inoperative due to a component failure. In contrast, according to the topology illustrated in Fig. 2C, data can be communicated directly between nodes A and D. The additional link between nodes A and D provides an alternate path for the data, thus, expanding the total network capacity and reliability. Note, however, that in the MAN illustrated in Fig. 2C, data communicated between nodes B and D must pass through node A or node C. The cross-link illustrated in Fig. 2D provides an additional path for communicating data directly between the nodes B and D, further expanding the network capacity and reliability. If desired, yet another link can be added to Fig. 2D for communicating data directly between nodes A and C. In addition, redundant links can be provided between pairs of nodes of the MAN. By providing alternate data communication paths, data communicated in the network can be routed to avoid communication links that are temporarily degraded due to environmental conditions, temporarily congested due to large amounts of network demand, or



inoperative due to a component failure.

Note that the network topology can be configured to take advantage of foreknowledge about demand expected to be placed on the network. For example, assume it is known that an headquarters must communicate large amounts of data with each of several branch offices, but that the branch offices communicate less data with each other.

A star topology, as illustrated in Fig. 2E, is well suited for such a MAN if the headquarters is located at node A and the branch offices located at nodes B-E. Note, however, that other network topologies, such as a ring topology (illustrated in Figs. 2C or 2D), can be used for a MAN having a headquarters and branch office. In the star topology, data is communicated directly between each branch office and the headquarters, however, data communicated between branch offices must be indirectly communicated via the headquarters. If, however, each of the branch offices must also communicate large amounts of data with each other, additional links can be utilized, as shown in Fig. 2F. The network illustrated in Fig. 2F has a high capacity and reliability due to the large number of alternate communication paths. For example, data communicated between nodes B and D can pass through node E, or node A, or node C.

Accordingly, a network topology can be designed for interconnecting a given number of nodes with a number of links selected to provide enough alternate communication paths that the network has sufficient capacity and reliability while minimizing the associated costs. Note that additional links can be added to an existing MAN in order to keep up with increases in demand. In addition, nodes not connected to a LAN may function solely as repeating stations for increasing the number of alternate communication paths and for transmitting data over long distances.

Fig. 3 illustrates a functional block diagram of a router 300 according to the present invention coupled to a LAN 302. The router 300 includes several functional blocks 304-318 interconnected by an interconnection 320. Functions of the blocks 304-318 can be implemented by hardware circuits, in which case, the interconnection 320 represents a communication bus. Alternately, functions performed by the blocks 304-318 can be implemented by a processor operating according to a stored software program. The router 300 can be constructed as a dedicated stand-alone unit or the router 300 can be constructed by adding one or more circuit boards and software to an existing personal computer

system.

The LAN 302 can operate according to any LAN protocol, though Ethernet is preferred due to its widespread utilization in existing sites, due in part because Ethernet LANs generally utilize telephone cabling that is pre-existing in many buildings. At the medium access control (MAC) level, Ethernet transmits data in packets according to a CSMA/CD protocol. Each Ethernet data packet generally includes a preamble, a destination node address, a source node address, a data field and a data check field.

The router 300 interconnects with the LAN 302 as though the router 300 is an additional node in the LAN 302. As such, the router 300 can send and receive data packets to and from the other nodes of the LAN 302 according the communication protocol of the LAN 302. The LAN 302 is interconnected to the router 300 through the LAN interface 308. The LAN interface 308 monitors data packets of the LAN 302; if the destination node address of a packet indicates that the packet is destined for a node contained in a LAN other than the LAN 302, the LAN interface 308 accepts the data packet. If the destination node address indicates that the data packet is destined for node within the LAN 302, the LAN interface 308 ignores the packet.

Data packets received from the LAN 302 are stored in the buffer 318 and conditioned for transmission over the MAN under control of the system control 306. This conditioning can include converting the format of the data into a format appropriate for transmission over the MAN. Such conversion may be necessary if the LAN 302 includes a LAN type other than Ethernet.

The routing table 304 stores data representative of the topology of the MAN, including a table which identifies which router of the MAN is coupled to each node of each LAN interconnected by the MAN. The router 300 reads the destination address contained in the packet received from the LAN 302 and utilizes the routing table 304 to determine which router (destination router) of the MAN is coupled to the LAN which includes the destination node. A header is then appended to the data packet which identifies the destination router that is to receive the packet. An additional data check field may also be added to each data packet, encapsulating the original data packet.

The packet is then communicated over an appropriate one of the links 322A-C to an appropriate outer system 400 (Fig. 4). If there is more than one outer system 400, the

appropriate outer system 400 is selected according to the routing algorithm 312 and according to the routing table 304. The routing algorithm 312 preferably includes an Open-Shortest-Path-First algorithm (OSPF), although alternate paths can be selected, however, based upon detected transmission quality conditions and traffic levels in the MAN, as explained herein.

When the appropriate outer system 400 (Fig. 4) is available to transmit the data, the data is provided to the appropriate outer system 400 by the outer system interface 316 through the selected one of the links 322A-C. Though the outer system interface 316 is illustrated in Fig. 3 as being capable of interfacing the router 300 with up to three outer systems 400 through the links 322A-C, it will be apparent that more or fewer links 322A-C can be provided and, thus, more or fewer outer systems 400 can interface to a single router 300. Preferably, the links 322A-C operate according to Fast Ethernet standards, such as 100 BASE-TX, 100 BASE-FX or 100 BASE-T4, though other standards can be used, such as 10 BASE-T or 10 BASE-F. Because the router 300 is preferably located in a wiring closet and the one or more outer systems 400 are preferably located on a rooftop, the links 322A-C will generally extend from the wiring closet to the rooftop. Data packets for communication over the MAN; commands for communication between the router 300 and outer system 400 (node commands); and commands for communication between routers 300 (network commands) are all communicated over the links 322A-C at appropriate times.

Fig. 4 illustrates a functional block diagram of an outer system 400 according to the present invention. Data packets from the outer system interface 316 (Fig. 3) of the router 300 are received from a respective one of the links 322A-C by a router interface 402 and passed to a baseband processor 404. The baseband processor 404 selectively alters the bit rate of the data packets, selectively performs error correction encoding on the data packets and selectively performs spectrum spreading on the data packets, as necessary. Preferably, the baseband processor 404 can also selectively encrypt the data according to known encryption techniques for data security reasons. Data packets are then passed to the modulator section 408A of a modulator/demodulator 408. The modulator section 408A appropriately modulates the data onto a radio frequency carrier signal according to a selected modulation scheme, forming a modulated signal.

The modulated signal is then up-converted, amplified and transmitted over a

wireless communication link of the MAN by a transmitter section 410A of a radio frequency (RF) transceiver 410. The transceiver 410 is coupled to an antenna 412 for this purpose. Preferably, a high-gain, directional antenna is used to achieve distances of up to 10 kilometers. This range is related to the preferred transmission frequency of 38 GHz, though a lower transmission frequency can be used which would result in a longer maximum transmission distance. Similarly, a transmission frequency higher than 38 GHz can also be used for a shorter range. The transceiver 410 is configured to adjust the power at which the modulated carrier signal is transmitted. The power is adjusted under control of the system control 306 (Fig. 3) of the router 300 by sending node commands to the outer system 400 over the appropriate one of the links 322A-C.

Data packets received from the wireless link are picked up by the antenna 412 and received by a receiver section 410B of the radio frequency transceiver 410. The received signal is appropriately demodulated by a demodulator section 408B of the modulator/demodulator block 408, reversing modulation performed on the data before the data was transmitted over the wireless link. The demodulated data is then passed to the baseband processor 404 which appropriately decodes the data, applies error correction to the data, and reverses any spectrum spreading or encryption applied to the data before it was transmitted over the link. The data packet is then communicated to the router 300 through the router interface 402.

A Transmission Quality Monitor 406 is coupled to the router interface 402, to the baseband processor 404, to the modulator/demodulator 408 and to the RF transceiver 410. The Transmission Quality Monitor 406 monitors the quality of the wireless transmission link from which the data is received in several ways. For example, the Transmission Quality Monitor 406 calculates the bit error rate (BER) based upon data errors reported to the Transmission Quality Monitor 406 by the baseband processor 404. In addition, the Transmission Quality Monitor 406 can monitor the received signal strength (RSL) from the receiver 410B and the signal-to-noise ratio (SNR) of the signal received from the demodulator 408B. Other performance parameters, such as cluster variance, eye opening, uncorrected error count, and so forth, can also be monitored.

The performance parameters, such as BER, RSL, and SNR, are considered herein as forming a performance indicator of the wireless link in the receiving direction. The

Transmission Quality Monitor 406 periodically reports the monitored performance indicator to the router 300. The Transmission Quality Monitor 406 also sends the measured performance indicator to its counterpart in the other node of the wireless link so that both nodes have a complete knowledge of the performance parameters in both directions of communication. The Transmission Quality Monitor 406 then performs an appropriate control procedure discussed herein in order to maintain the required transmission performance. For example, referring to the wireless link connecting nodes B and C in Fig. 2C, the Transmission Quality Monitor 406 of node B periodically reports its monitor performance to the Transmission Quality Monitor 406 of node C and vice versa. The Transmission Quality Monitors 406 of both nodes keep a history of the performance indicators for further performance and fault analysis by itself or by the Transmission Quality Processor 314. As the values of the performance indicators are periodically exchanged, there is a built-in form of repetitive transmission and diversity transmission. As used herein, repetitive transmission refers to transmitting data redundantly, whereas, diversity transmission refers to the sending of data according to multiple different formats. As a result, the present invention quickly detects changes in the performance indicator and appropriately responds to such changes. Accordingly, any abrupt change in newly received data is readily filtered out.

Each Transmission Quality Processor 314 can be coupled to more than one outer system 400, and thus, each router 300 can receive transmissions of performance indicators from these more than one wireless link. In addition, each Transmission Quality Processor 314 can receive the performance indicators of other links in the MAN via network commands. Accordingly, each Transmission Quality Processor 306 can analyze the global (throughout the entire MAN) transmission quality of the wireless links in the MAN and can determine an appropriate response based upon current quality conditions for each of the wireless links coupled to the router 300, past quality conditions for each of the wireless links coupled to the router 300 and based upon current or past quality conditions for other wireless links reported by one or more other routers of the MAN.

Data packets communicated to the router 300 from the outer system 400 are received by the outer system interface 316 of the router 300. By examining the header appended to the packet, the outer system interface 316 determines whether the router 300 is

an intermediate router in the communication path for the packet and whether the LAN 302 is the final destination for the data packet. If the LAN 302 is the final destination for the data packet, the packet is conditioned for communication to the LAN 302. This conditioning includes the removal of the additional header that was appended to the data packet before transmission. The data packet is stored in the buffer 318 until the LAN 302 is available to receive the packet.

If the LAN 302 is not the final destination for the packet, the router 300 is an intermediate router in the communication path for the data packet. In such case, the outer system interface 316 stores the packet in the buffer 318. When more than one outer system 400 is coupled to the router 300, the routing algorithm 312 then determines to which of these outer systems 400 to communicate the packet for transmission over the MAN. This determination is based upon an OSPF algorithm using the routing table 304 and routing algorithm 312 and upon detected transmission quality conditions and traffic levels in the MAN. When the appropriate outer system 400 is available to retransmit the packet to the next router in the communication path for the packet, the packet is retrieved from the buffer 318 by the outer system interface 316 and is provided to the appropriate outer system 400 which retransmits the data over the MAN.

The amount of data traffic through the router 300 (data transmitted and received by the router 300) is monitored by the traffic monitor and control 310 based upon the amount of data stored and removed from the buffer 318 and the frequency at which the data is stored and removed from the buffer 318. The amount of data traffic is used by the routing algorithm 312 for appropriately routing data in the MAN. The amount of data is the network demand on the node. The system control 306 can periodically communicate performance indicators and detected network demand to the other routers of the MAN via network command packets. Although the Transmission Quality Processor 314 and system control 306 are shown as parts of the router 300, they can also be implemented as software functions located in a workstation or in a network controller connected to the network. Preferably, overhead associated with communicating the network command packets is less than two percent of the total data throughput capacity of the MAN.

For a normal operation, the BER of wireless links throughout the MAN is preferably maintained below an acceptable threshold. Link availability is defined as the

percentage of the time of normal operation. For example, a link availability of 99.99% and a required threshold BER of  $10^{-9}$  imply that 99.99% of the time, the BER of wireless links throughout the MAN is maintained below  $10^{-9}$ . High link availability and low BER threshold are preferred in the MAN. In a clear-sky condition, the signal attenuation is mainly due to a free-space propagation loss. The power of the transmitted signal should be high enough to maintain the BER below an acceptable threshold. However, in an abnormal condition, additional losses (rain-fade) can be introduced by atmospheric changes such as rain, fog, ducting, and so forth. Therefore, in order to maintain a normal operation in an abnormal condition, the transmitter must operate with a transmitted power above that required in a clear-sky condition. The difference between the power of the transmitted signal and that required in a clear-sky condition is known as the fade margin. Higher required link availability or a longer range requires a larger fade margin. Since the signal attenuation due to rain over high radio frequency bands, such as 38 GHz, is very high, a traditional wireless link design based on the fade margin requires an excessively high transmitted power or yields an impracticably short range to achieve the required high availability. The present invention presents a novel method of and apparatus for achieving both long range and high link availability with low transmitted power by using a combination of adaptive modulation, low-rate error correction coding and data rate reduction techniques for rain-fade countermeasure. Furthermore, by including an intelligent routing strategy where data is communicated between nodes via one or more appropriately selected paths (link diversity), the present invention increases the MAN capacity and reliability.

By using a combination of adaptive power control, data rate reduction, modulation level reduction, and low-rate error correction coding, a longer range can be achieved at low transmitted power, as described herein. Consider, as an example, a programmable M-ary Quadrature Amplitude Modulation (QAM) scheme being used in the modulator/demodulator 408 in Fig. 3. For example, assume 16QAM is used to carry 100Mb/s full-duplex Fast Ethernet over a wireless link in the MAN. In order to achieve a BER of better than  $10^{-4}$ , the RSL must be kept higher than a predefined threshold level, designated herein as RSL16. Furthermore, in order to avoid performance degradation due to nonlinear AM-to-AM and AM-to-PM distortions, the transmitted power is preferably

maintained at 6dB or more below the 1dB-compression point of the power amplifier for 16QAM. The 1dB-compression point refers to an input signal applied to the power amplifier which results in an output signal that is 1dB lower than would be expected if the power amplifier had linear gain.

5 In a given time interval during rain fades, if the monitored BER and RSL of a particular link are approaching their predefined threshold levels, (e.g.,  $10^{-4}$  and RSL16), appropriate countermeasures are invoked in order to improve link performance and maintain the required link availability. The countermeasures can be one or more of the following: momentarily reducing the link transmission rate, reducing the modulation level  
10 and/or introducing a low-rate error correction coding. For example, if in response to rain fade, the link operates at a transmission rate that is reduced to 50Mb/s, and with a modulation level that is reduced to 4QAM, its RSL threshold for  $10^{-4}$ , designated herein as RSL4, is 8dB lower than the threshold RSL16. In addition, since 4QAM can tolerate more nonlinear AM-to-AM and AM-to-PM distortions, the transmitted power can be increased up  
15 to 2dB below the 1dB-compression point of the power amplifier. In other words, with the same power amplifier, the useable transmitted power for 4QAM is 4dB higher than that in the case of 16QAM. Therefore, by switching from 100Mb/s, 16QAM to 50Mb/s, 4QAM, the net gain in RSL is 12dB. Accordingly, the link can maintain the required availability despite an increase of 12dB in signal attenuation due to rain fade.

20 By further reducing the transmission rate to 6.25Mb/s and using 4QAM, the gain in rate reduction is 9dB as compared to the case of 50Mb/s and 4QAM. Furthermore, for the same occupied bandwidth, a low-rate error correction coding scheme such as the Super-Orthogonal Convolutional Code can be used to obtain an additional coding gain of 5dB. In addition, spectrum spreading can be used in conjunction with data rate reduction to reduce  
25 the interference between communication links. In other words, operation at 6.25Mb/s and 4QAM provides an overall gain of 14dB as compared to 50Mb/s, 4QAM, or of 26dB as compared to 100Mb/s, 16QAM.

The obtained gain is used to compensate the increase in signal attenuation due to rain over a relatively short duration of time. For example, consider an objective  
30 availability of 99.99% for a wireless link required to provide 100Mb/s full-duplex fast Ethernet. According to conventional design techniques, in order to maintain the required



availability, such a link would have a link power budget that includes a large fade margin for fixed operation at 100Mb/s. In contrast, according to the present invention, a link availability of 99.9% can be achieved while providing a comparatively longer range for operation at 100Mb/s, 16QAM. Further, a higher link availability of 99.99% can be provided by the present invention for operation at lower data rate and lower modulation level.

The packet-switched nature of Ethernet is advantageously utilized by the present invention in the MAN. For example, packet-switched communications tend to be bursty in that network demand can be characterized by periods of relatively high demand and periods of relatively low demand. In addition, packet-switched communications also tend to be somewhat delay tolerant in that packets can be temporarily stored before they are forwarded (store and forward). Accordingly, an overall availability of 99.99% can be achieved through the present invention in a MAN that provides the maximum transmission rate (e.g. 100 Mb/s) 99.9% of the time and a reduced transmission rate (e.g. 50 Mb/s or 6.25 Mb/s) the remaining 0.09% of the time to maintain acceptable performance during heavy rain fades. If during such heavy rain fades, the actual traffic flow over that link is below the reduced transmission rate, no further action is required. If the demand on that link, however, exceeds the reduced transmission rate, the router 300 re-directs the excessive traffic to other, alternate, links of the MAN. Data packets are preferably transmitted according to an Open-Shortest-Path-First (OSPF) algorithm. Therefore, if the shortest communication path between a source router and destination router has sufficient available bandwidth, all the data will be transmitted along this shortest path. If the shortest path momentarily does not have sufficient transmission capacity to accommodate the current traffic flow due to the reduced data rate, however, all or selected data packets can be routed along a longer, but less busy, alternate communication path. Preferably, alternate communication paths are selected to be the next shortest paths.

Note that in a conventional wireless communication link, if, in a given area, a fade margin of 9 dB/km is required to maintain an availability of 99.9%, then it must be increased to 24 dB/km to maintain an availability of 99.99%. Therefore, in contrast to conventional wireless communications, the present invention maintains an overall availability of 99.99% or better by adapting the manner of transmission and the path of

transmission to the environmental conditions (by detecting transmission quality) and to the demand placed upon the network (by detecting traffic loads) and by reliance upon the delay tolerant nature of packet switched communications. As a result, a MAN can be constructed according to the present invention that is much more efficient, in terms of cost, power and bandwidth utilization, than in the prior art, to cover a substantially longer distance. For example, to achieve an objective link availability of 99.99% with a transmit power of 50mW in a given area, the conventional link budget design based on a fixed fade margin for 100Mb/s, 16QAM can provide an expected range of 3.5km. For the same transmitted power and environmental conditions, the present invention having adaptive rain-fade countermeasure techniques can provide an expected range of 5km or 7km with a reduced rate during short periods of heavy rain fades of 50Mb/s or 6.25Mb/s, respectively.

As an illustrative example of the implementation of a monitoring and control procedure according to the present invention, Figs. 5 and 6 illustrate a flow diagram and timing relationships between monitored RSL and transmitted power during a period of heavy rain fade, respectively. Consider, for example, the wireless link between nodes B and C in Fig. 2C. The nodes B and C periodically exchange their monitored performance indicators. The flow diagram starts in the block 500 and followed by the node B, though it will be apparent that the Node C follows a corresponding flow diagram. Node B keeps track of its own transmitted power and the monitored RSL and BER of Node C in block 501 (Fig. 5), and vice versa. In a normal condition, Node B sets its transmitted power 602 (Fig. 6) to a nominal level 606 for a data rate of 100Mb/s and 16QAM. This nominal level 606 is selected to be low enough to avoid nonlinear effects on the link performance of the transmit power amplifier of Node B as well as of the receiver of Node C. For 16QAM, this nominal level 606 is preferably 6dB or more below the 1dB-compression point of the power amplifier. The nominal level 606 is also selected to ensure that the transmission link is of sufficient quality such that the bit error rate (BER) will generally be below the maximum predetermined level, while avoiding transmitting the signal at an excessive power which might interfere with other wireless links. A similar arrangement is applied to Node C.

When rain fade occurs over the link between the nodes B and C, the RSL of both Node B and Node C tends to be reduced. As the RSL of Node C 601 (Fig. 6) is

approaching the threshold value  $RSL_{16}$  604, the monitored BER also tends to increase. In the block 502 (Fig. 5), Node B continuously compares the monitored RSL of Node C 601 to a preset warning level  $RSL_w$  603 (Fig. 6) where  $RSL_w$  is selected to be higher than  $RSL_{16}$  604. When the monitored RSL of Node C 601 is below the preset warning level  $RSL_w$  603, Node B sends a control message to Node C instructing Node C to prepare to switch to lower data rate and to a lower modulation level (e.g., 50Mb/s, 4QAM) in the block 503 (Fig. 5). The router of Node B is also conditioned to prepare for the re-direction of excessive traffic, if necessary. Upon reception of the control message from B, Node C prepares for the change and sends an acknowledgment message to B. Node B receives the acknowledgment message from Node C, as verified in the block 504. Then, Node B applies the reduced data rate and lower modulation level on its transmitted signal in a manner that is coordinated with the Node C in the block 505. Node B also increases its transmitted power 602 (Fig. 6) to its maximum level for 4QAM 607. Selection of the warning level  $RSL_w$  603 (Fig. 6) takes into consideration the delay time 608 for the Nodes B and C to process and exchange commands so that the switching to the operation at the low data rate and low modulation level takes place before the RSL drops below  $RSL_{16}$ . Since statistical measures indicate that the maximum rain-fade rate is about 0.5dB/s, the warning level  $RSL_w$  is normally relatively close to  $RSL_{16}$ .

Assuming that the rain fade is transitory, switching from low data rate to high data rate occurs. Node B continuously receives the monitored RSL and BER from Node C in the block 506 (Fig. 5). When the rain fade is reduced, the RSL is increased. In the block 507 (Fig. 5), Node B continuously compares the monitored RSL of Node C to a preset level  $RSL_p$  605 (Fig. 6). As the RSL of Node C 601 (Fig. 6) becomes higher than the preset level  $RSL_p$  605, Node B sends to Node C a message requesting a change to higher data rate and an increased modulation level in the block 508 (Fig. 5). In response to this received message, Node C conditions itself to prepare for the higher data rate and higher modulation level, and sends an acknowledgment message to Node B. Node B receives the acknowledgment from Node C, as verified in the block 509 (Fig. 5). Node B then applies the higher data rate and higher modulation level on its transmitted signal in a coordinated manner with the Node C in the block 510. Node B also reduces its transmitted power back to the normal level, and informs its router of this condition. The preset level  $RSL_p$  605

(Fig. 6) is selected to be higher than  $RSL_{w, 603}$ , introducing hysteresis to prevent changing the data format unnecessarily often.

The above procedure is executed by the Transmission Quality Processor 314 under the supervision of the system control 306 in Fig. 3. In the above descriptions, examples with two operational sets: 100Mb/s with 16QAM; and 50Mb/s with 4QAM, are used to illustrate the above technique. However, it will be apparent that the above technique is readily applicable to other low data rates and to more than two operation sets.

The present invention has been described in terms of specific embodiments incorporating details to facilitate the understanding of the principles of construction and operation of the invention. Such reference herein to specific embodiments and details thereof is not intended to limit the scope of the claims appended hereto. It will be apparent to those skilled in the art that modifications may be made in the embodiment chosen for illustration without departing from the spirit and scope of the invention. Specifically, it will be apparent to one of ordinary skill in the art that the device of the present invention could be implemented in several different ways and the apparatus disclosed above is only illustrative of the preferred embodiment of the invention and is in no way a limitation.

Claims

What is claimed is:

1 1. A method of communicating data between local area networks, the method  
2 comprising steps of:

- 3 a. establishing a communication path for a data transmission wherein the  
4 communication path includes one or more wireless communication links  
5 between pairs of the local area networks;  
6 b. transmitting the data along the path;  
7 c. monitoring a transmission quality of the one or more communication links;  
8 d. comparing the monitored transmission quality to a predefined transmission  
9 quality; and  
10 e. selectively activating a technique for altering a manner in which the data is  
11 transmitted based upon the comparison.

1 2. The method according to claim 1 wherein the step of monitoring a  
2 transmission quality includes a step of monitoring a rate at which errors occur in the data.

1 3. The method according to claim 1 wherein the step of selectively activating  
2 includes a step of transmitting a command over the one or more wireless links.

1 4. The method according to claim 1 further comprising a step of monitoring an  
2 amount of data communicated over the one or more wireless links and wherein the step of  
3 selectively activating is performed based also upon the amount of data communicated.

1 5. The method according to claim 1 wherein the technique alters a data  
2 transmission rate.

1 6. The method according to claim 1 wherein the technique alters a modulation  
2 scheme for transmitting the data.

- 1 7. The method according to claim 1 wherein the technique alters error  
2 correction coding for transmitting the data.
- 1 8. The method according to claim 1 wherein the technique alters spectrum  
2 spreading for transmitting the data.
- 1 9. The method according to claim 1 wherein the technique alters a power level  
2 for transmitting the data.
- 1 10. The method according to claim 1 wherein the technique alters the  
2 communication path for transmitting the data.
- 1 11. The method according to claim 1 wherein the technique is a combination of  
2 two or more selected from a group consisting of: altering a bit rate for transmitting the  
3 data; altering a modulation scheme for transmitting the data; altering error correction  
4 coding for transmitting the data; altering spectrum spreading for transmitting the data;  
5 altering a power level for transmitting the data; and altering the communication path for  
6 transmitting the data.
- 1 12. The method according to claim 1 wherein the data is communicated between  
2 Ethernet-based LAN's or MAN's.
- 1 13. The method according to claim 1 further comprising steps of:  
2 a. monitoring a received signal strength;  
3 b. comparing the received signal strength to an expected level; and  
4 c. selectively adjusting a power level for transmitting the data based upon the  
5 comparison.
- 1 14. The method according to claim 1 further comprising steps of:  
2 a. monitoring a received signal strength;

- b. comparing the received signal strength to a range of predefined strengths;  
and
- c. selectively adjusting a power level for transmitting the data based upon the comparison wherein the power level for transmitting the data is controlled in a hysteresis manner.

1 15. The method according to claim 13 wherein the step of selectively adjusting  
2 includes a step of transmitting a command over the one or more wireless links.

1 16. A router for controlling wireless data transmissions among a plurality of  
2 local area networks, wherein the router comprises:

- 3 a. a receiver coupled to receive a modulated data signal from a wireless link;  
4 b. a demodulator coupled to the receiver for forming a baseband data signal  
5 from the modulated signal;  
6 c. an error detector coupled to the demodulator for detecting errors in the  
7 baseband data signal; and  
8 d. a control circuit coupled to the error detector for comparing a rate at which  
9 the errors occur in the data to a predefined rate, wherein, based upon the  
10 comparison, the control circuit causes a command to be transmitted over the  
11 wireless link for selectively activating a technique for altering the rate at  
12 which the errors occur.

1 17. The router according to claim 16 wherein the technique alters a bit rate for  
2 transmitting the data over the wireless link.

1 18. The router according to claim 16 wherein the technique alters a modulation  
2 scheme for transmitting the data over the wireless link.

1 19. The router according to claim 16 wherein the technique alters error  
2 correction coding for transmitting the data over the wireless link.

20. The router according to claim 16 wherein the technique alters spectrum spreading for transmitting the data over the wireless link.

1 21. The router according to claim 16 wherein the technique alters a  
2 communication path for transmitting the data.

1 22. The router according to claim 16 wherein the technique is a combination of  
2 two or more selected from a group consisting of: altering a bit rate for transmitting the  
3 data; altering a modulation scheme for transmitting the data; altering error correction  
4 coding for transmitting the data; altering spectrum spreading for transmitting the data;  
5 altering a power level for transmitting the data; and altering a communication path for  
6 transmitting the data.

1 23. The router according to claim 16 wherein the data is communicated over the  
2 wireless link between Ethernet-based LAN's or MAN's.

1 24. A router for controlling wireless data transmissions among a plurality of  
2 local area networks, wherein the router comprises:  
3 a. a receiver coupled to receive a modulated data signal from a wireless link;  
4 b. a monitoring circuit for monitoring a strength of the modulated data signal;  
5 and  
6 c. a control circuit coupled to the monitoring circuit for comparing strength of  
7 the modulated signal to a predefined rate, wherein, based upon the  
8 comparison, the control circuit causes a command to be transmitted over the  
9 wireless link for selectively adjusting a strength at which the modulated  
10 signal is transmitted over the wireless link.

1 25. The router according to claim 24 further comprising a demodulator coupled  
2 to the receiver for forming a baseband data signal from the modulated signal, wherein the  
3 monitoring circuit monitors a rate at which errors occur in the data.



26. The router according to claim 25 wherein the control circuit compares the monitored performance indicator to a preset threshold, wherein, based upon the comparison, the control circuit causes a command to be transmitted over the wireless link for selectively activating a technique for altering the rate at which the errors occur.

27. A metropolitan area network for communicating data among a plurality of local area networks, the metropolitan area network comprising:

- a. a plurality of transceivers, wherein pairs of the transceivers communicate data with each other over a corresponding wireless link, each transceiver including a transmitter for transmitting data over the corresponding wireless link and each transceiver including a receiver for receiving data from the corresponding wireless link;
- b. a plurality of transmission quality monitors, each coupled to a corresponding one of the plurality of transceivers for monitoring a transmission quality for the corresponding wireless link; and
- c. a plurality of routers, wherein each router is coupled to a corresponding one of the plurality of transceivers and to a corresponding one of the plurality of local area networks, for routing the data received from the corresponding wireless link to the local area network when the local area network is a destination for the data and for routing the data to another one of the plurality of routers when the local area network is not a destination for the data and wherein each router selectively alters a format for transmitting the data to the corresponding transceiver based upon the rate at which errors occur in the data.

28. The metropolitan area network according to claim 27 wherein at least one of the plurality of transmission quality monitors monitors the transmission quality for the corresponding wireless link by monitoring a rate at which errors occur in the data received from the corresponding wireless link.

29. The metropolitan area network according to claim 27 wherein a power level for transmitting data is controlled in a feedback loop.

1 30. The metropolitan area network according to claim 27 wherein the format for  
2 transmitting the data is selectively altered by transmitting a command over the  
3 corresponding wireless link.

1 31. The metropolitan area network according to claim 27 wherein the data is  
2 communicated among the plurality local area networks over a communication path  
3 comprising one or more wireless links.

1 32. The metropolitan area network according to claim 31 wherein each of the  
2 plurality of routers selectively alters the format for transmitting the data by selectively  
3 activating one or more techniques from a group consisting of: altering a bit rate for  
4 transmitting the data; altering a modulation scheme for transmitting the data; altering error  
5 correction coding for transmitting the data; altering spectrum spreading for transmitting the  
6 data; altering a power level for transmitting the data; and altering the communication path  
7 for transmitting the data.  
8

1/6

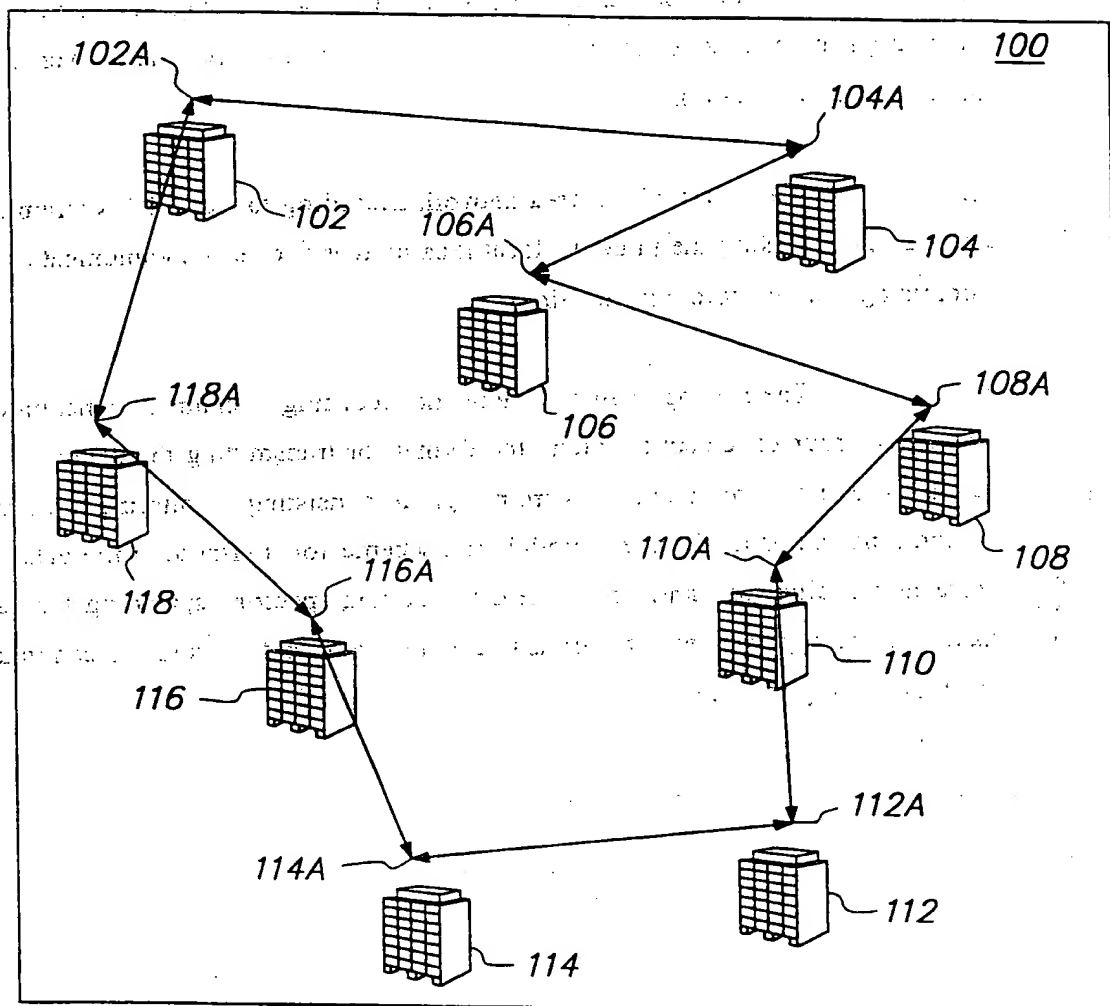




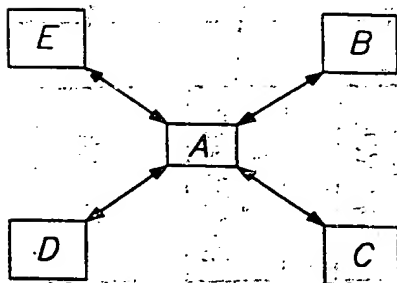
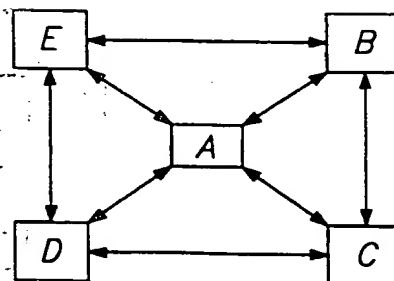


FIG. 1

2/6

**FIG. 2A****FIG. 2B****FIG. 2C****FIG. 2D****FIG. 2E****FIG. 2F**

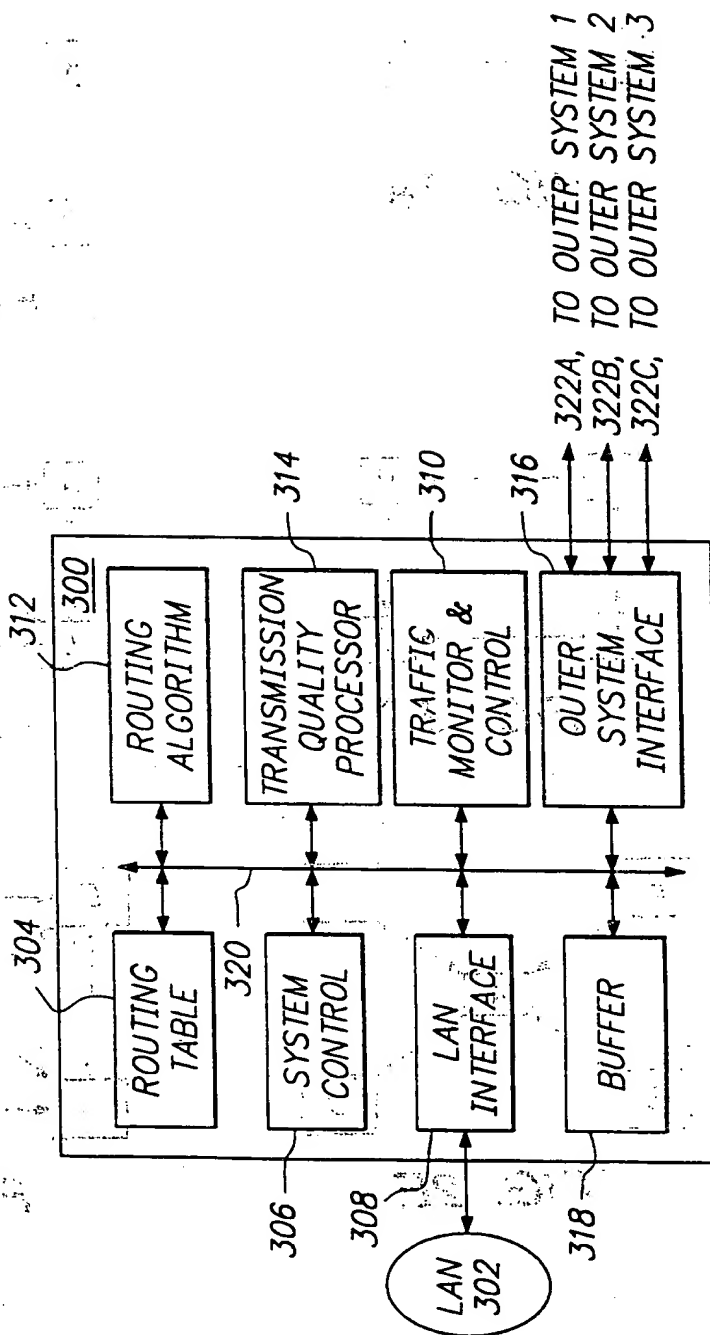


FIG. 3

4/6

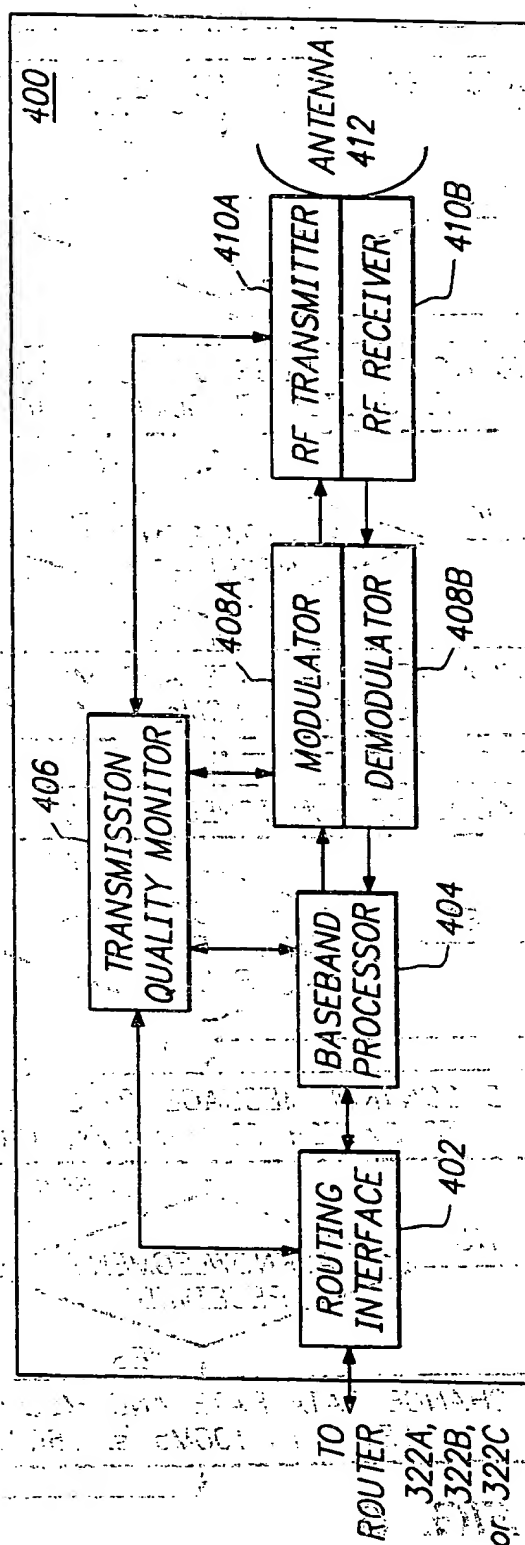
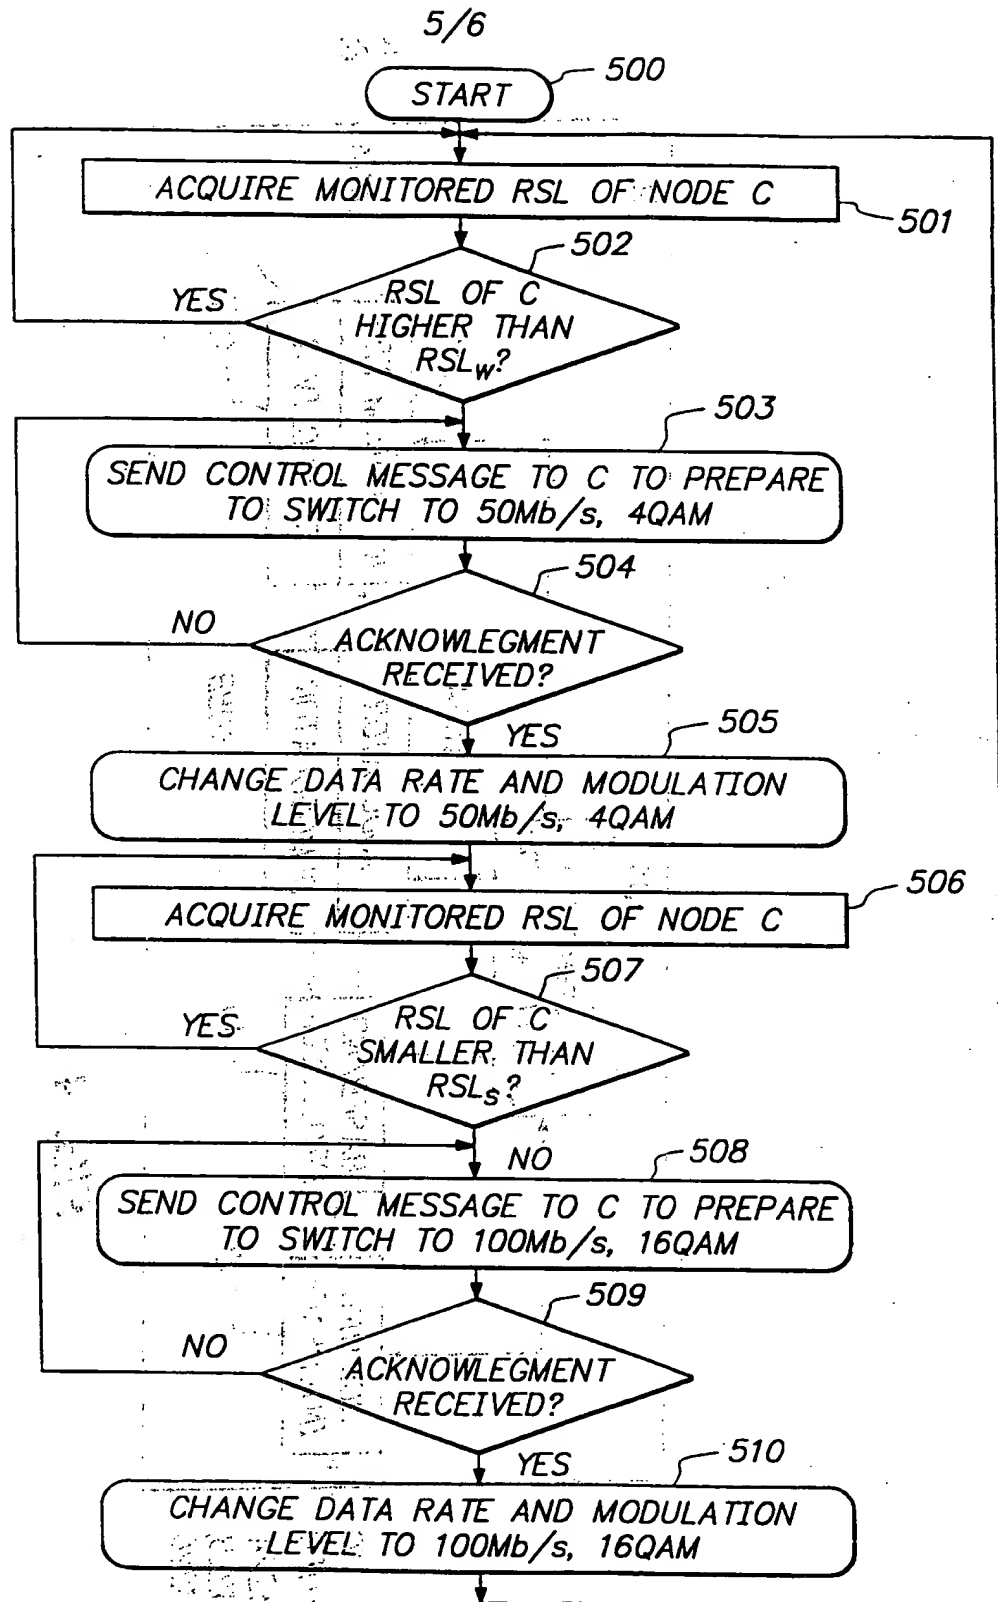


FIG. 4

**FIG. 5**

SUBSTITUTE SHEET (RULE 26)

6/6

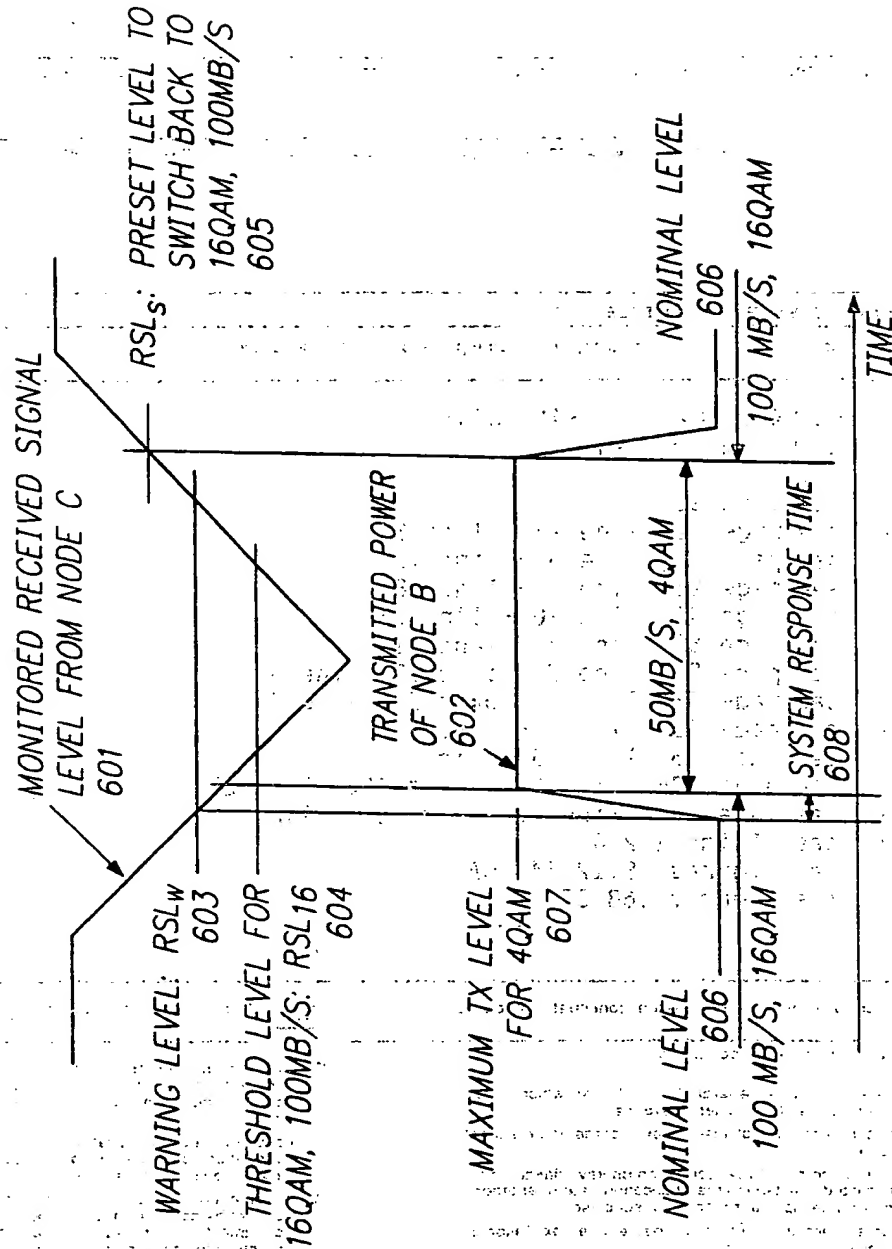


FIG. 6



# INTERNATIONAL SEARCH REPORT

Internat. Application No.

PCT/US 98/21854

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04L1/12 H04L27/34 H0487/005

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 94 27382 A (NORAND CORP) 24 November 1994  see abstract see page 12, line 23 - line 34 see page 21, line 8 - line 18 see page 25, line 3 - line 18 see page 46, line 10 - line 25 see page 50, line 3 - line 21 see page 52, line 8 - page 53, line 8 see page 55, line 9 - page 56, line 6 see page 58, line 3 - line 10	1-6, 8-13, 15-32
Y	see page 65, line 15 - line 24 see page 105, line 25 - page 106, line 25 see page 138, line 20 - page 139, line 8 see claims 1,2,4 see figures 18,12-14,16A see figures 16B,37	7,14



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 March 1999

Date of mailing of the international search report

01/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Toumpoulidis, T

# INTERNATIONAL SEARCH REPORT

Intern: al Application No  
PCT/US 98/21854

C.(Continuation), DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2 306 278 A (NIPPON ELECTRIC CO) 30 April 1997 see abstract see figure 2	7
Y	US 5 220 678 A (FEEI LOH J) 15 June 1993 see abstract see figure 1B	14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/US 98/21854

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9427382 A	24-11-1994	US 5555276 A	10-09-1996
		AU 6987694 A	12-12-1994
		CA 2162722 A	24-11-1994
		US 5696903 A	09-12-1997
		US 5657317 A	12-08-1997
		US 5790536 A	04-08-1998
		AU 696841 B	17-09-1998
		AU 5986994 A	19-07-1994
		EP 0681762 A	15-11-1995
		US 5682379 A	28-10-1997
		CA 2184811 A	08-09-1995
		WO 9524074 A	08-09-1995
		US 5726984 A	10-03-1998
GB 2306278 A	30-04-1997	JP 9116486 A	02-05-1997
		AU 6813796 A	17-04-1997
		US 5839077 A	17-11-1998
US 5220678 A	15-06-1993	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

This Page Blank (uspto)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>6</sup> : H04L 1/12, 27/34, H04B 7/005		A1	(11) International Publication Number: WO 99/20016
			(43) International Publication Date: 22 April 1999 (22.04.99)
(21) International Application Number: PCT/US98/21854		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 14 October 1998 (14.10.98)			
(30) Priority Data: 08/950,028 14 October 1997 (14.10.97) US			
(71) Applicant (for all designated States except US): WINNET MCS, INC. [US/US]; 635 Vaqueros Avenue, Sunnyvale, CA 94086 (US).			
(72) Inventor; and			
(75) Inventor/Applicant (for US only): LE-NGOC, Tho [CA/CA]; 8221 Du Mail, Anjou, Quebec H1K 125 (CA).		Published With international search report. With amended claims and statement.	
(74) Agents: HAVERSTOCK, Thomas, B. et al.; Haverstock & Owens LLP, Suite 420, 260 Sheridan Avenue, Palo Alto, CA 94306 (US).		Date of publication of the amended claims and statement: 15 July 1999 (15.07.99)	

**(54) Title: METHOD AND APPARATUS FOR MAINTAINING A PREDEFINED TRANSMISSION QUALITY IN A WIRELESS MAN NETWORK**

**(57) Abstract**

A technique for maintaining a predefined transmission quality in a wireless Metropolitan Area Network (MAN). Each of a plurality of Local Area Networks are coupled to a corresponding router. Each router is coupled to one or more transceivers for interconnecting the routers via wireless links. Each router stores a table representative of the topology of the MAN and receives detected indicia representative of the quality of the wireless links and representative of network traffic loads. The router adapts the manner of transmission and the path of transmission according to the indicia. As a result, the MAN is highly efficient, in terms of cost, power and bandwidth utilisation. For

example, a strength of a signal received over a wireless communication link is periodically monitored for maintaining the strength within a predefined range by adjusting the transmission power. In addition, an error rate for the data received over the link is monitored. If the received signal strength remains below the predefined range despite the transmit power having been adjusted to a maximum allowable level, and if the error rate approaches a predefined limit, one or more techniques are selectively employed to reduce the error rate while maintaining a sufficiently high network throughput. The adaptive techniques include changing the data rate, modulation level, error correction coding, and spectrum spreading. In addition, a path for the data is preferably selected according to an Open-Shortest-Path-First algorithm, though one or more alternate paths can be selected for transmitting at least a portion of the data.

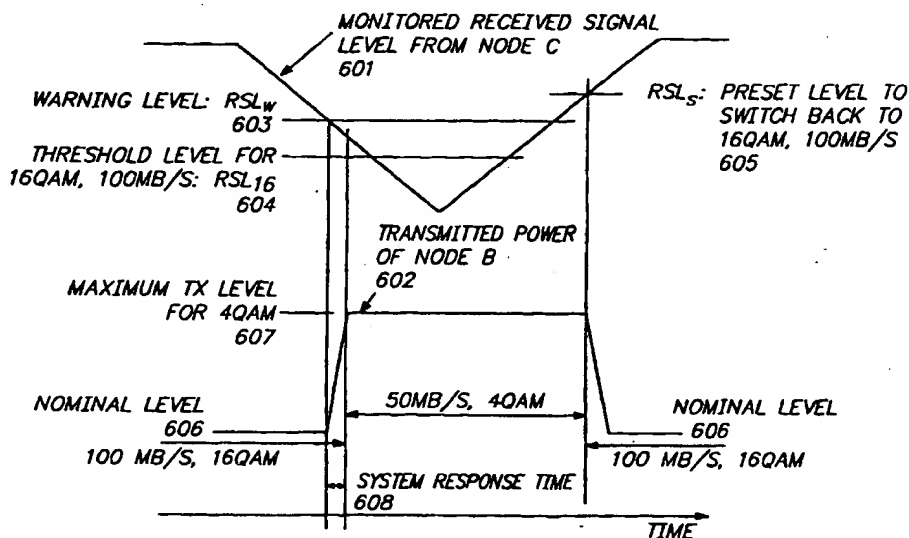

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## AMENDED CLAIMS

[received by the International Bureau on 29 May 1999 (29.05.99);  
original claims 6, 18 and 24-26 cancelled; original claims 1, 11, 16-17, 19-23 and 27 amended;  
new claims 33-44 added; remaining claims unchanged (7 pages)]

- 1 1. A method of communicating data between local area networks, the method  
2 comprising steps of:
  - 3 a. establishing a communication path for a data transmission wherein the  
4 communication path includes one or more wireless communication link;  
5 between pairs of the local area networks;
  - 6 b. transmitting the data along the path;
  - 7 c. monitoring a transmission quality of the one or more communication links;
  - 8 d. comparing the monitored transmission quality to a predefined transmission  
9 quality; and
  - 10 e. selectively activating a technique for altering a manner in which the data is  
11 transmitted based upon the comparison wherein the technique alters a  
12 modulation scheme for transmitting the data.
- 1 2. The method according to claim 1 wherein the step of monitoring a  
2 transmission quality includes a step of monitoring a rate at which errors occur in the data.
- 1 3. The method according to claim 1 wherein the step of selectively activating  
2 includes a step of transmitting a command over the one or more wireless links.
- 1 4. The method according to claim 1 further comprising a step of monitoring an  
2 amount of data communicated over the one or more wireless links and wherein the step of  
3 selectively activating is performed based also upon the amount of data communicated.
- 1 5. The method according to claim 1 wherein the technique alters a data  
2 transmission rate.
- 1 7. The method according to claim 1 wherein the technique alters error  
2 correction coding for transmitting the data.

- 1 8. The method according to claim 1 wherein the technique alters spectrum  
2 spreading for transmitting the data.
- 1 9. The method according to claim 1 wherein the technique alters a power level  
2 for transmitting the data.
- 1 10. The method according to claim 1 wherein the technique alters the  
2 communication path for transmitting the data.
- 1 11. The method according to claim 1 wherein the technique is a combination of  
2 two or more selected from a group consisting of: altering a bit rate for transmitting the  
3 data; altering error correction coding for transmitting the data; altering spectrum spreading  
4 for transmitting the data; altering a power level for transmitting the data; and altering the  
5 communication path for transmitting the data.
- 1 12. The method according to claim 1 wherein the data is communicated  
2 between Ethernet-based LAN's or MAN's.
- 1 13. The method according to claim 1 further comprising steps of:  
2 a. monitoring a received signal strength;  
3 b. comparing the received signal strength to an expected level; and  
4 c. selectively adjusting a power level for transmitting the data based upon the  
5 comparison.
- 1 14. The method according to claim 1 further comprising steps of:  
2 a. monitoring a received signal strength;  
3 b. comparing the received signal strength to a range of predefined strengths;  
4 and  
5 c. selectively adjusting a power level for transmitting the data based upon the  
6 comparison wherein the power level for transmitting the data is controlled  
7 in a hysteresis manner.



1 15. The method according to claim 13 wherein the step of selectively adjusting  
2 includes a step of transmitting a command over the one or more wireless links.

1 16. An apparatus for controlling wireless data transmissions among a plurality  
2 of local area networks, wherein the apparatus comprises:

3 a. a receiver coupled to receive a modulated data signal from a wireless link;

4 b. a demodulator coupled to the receiver for forming a baseband data signal  
5 from the modulated signal;

6 c. an error detector coupled to the demodulator for detecting errors in the  
7 baseband data signal; and

8 d. a control circuit coupled to the error detector for comparing a rate at which  
9 the errors occur in the data to a predefined rate, wherein, based upon the  
10 comparison, the control circuit causes a command to be transmitted over the  
11 wireless link for selectively activating a technique for altering the rate at  
12 which the errors occur wherein the technique alters a modulation scheme for  
13 transmitting the data.

1 17. The apparatus according to claim 16 wherein the technique alters a bit rate  
2 for transmitting the data over the wireless link.

1 19. The apparatus according to claim 16 wherein the technique alters error  
2 correction coding for transmitting the data over the wireless link.

1 20. The apparatus according to claim 16 wherein the technique alters spectrum  
2 spreading for transmitting the data over the wireless link.

1 21. The apparatus according to claim 16 wherein the technique alters a  
2 communication path for transmitting the data.

1 22. The apparatus according to claim 16 wherein the technique is a combination  
2 of two or more selected from a group consisting of: altering a bit rate for transmitting the

3 data; altering error correction coding for transmitting the data; altering spectrum spreading  
 4 for transmitting the data; altering a power level for transmitting the data; and altering a  
 5 communication path for transmitting the data.

1 23. The apparatus according to claim 16 wherein the data is communicated over  
 2 the wireless link between Ethernet-based LAN's or MAN's.

1 27. A metropolitan area network for communicating data among a plurality of  
 2 local area networks, the metropolitan area network comprising a plurality of terminals,  
 3 each terminal comprising:

- 4 a. a transceiver each coupled to a directional antenna, wherein pairs of the  
 5 transceivers communicate data with each other over a corresponding  
 6 wireless link, each transceiver including a transmitter for transmitting data  
 7 over the corresponding wireless link and each transceiver including a  
 8 receiver for receiving data from the corresponding wireless link;
  - 9 b. a plurality of transmission quality monitors, each coupled to a corresponding  
 10 one of the plurality of transceivers for monitoring a transmission quality for  
 11 the corresponding wireless link; and
  - 12 c. a plurality of routers, wherein each router is coupled to a corresponding one  
 13 of the plurality of transceivers and to a corresponding one of the plurality of  
 14 local area networks, for routing the data received from the corresponding  
 15 wireless link to the local area network when the local area network is a  
 16 destination for the data and for routing the data to another one of the  
 17 plurality of routers when the local area network is not a destination for the  
 18 data
- 19 and wherein each terminal selectively alters a format for transmitting the data to the  
 20 corresponding transceiver based upon the rate at which errors occur in the data.

1 28. The metropolitan area network according to claim 27 wherein at least one  
 2 of the plurality of transmission quality monitors monitors the transmission quality for the  
 3 corresponding wireless link by monitoring a rate at which errors occur in the data received  
 4 from the corresponding wireless link.

1 29. The metropolitan area network according to claim 27 wherein a power level  
2 for transmitting data is controlled in a feedback loop.

1 30. The metropolitan area network according to claim 27 wherein the format for  
2 transmitting the data is selectively altered by transmitting a command over the  
3 corresponding wireless link.

1 31. The metropolitan area network according to claim 27 wherein the data is  
2 communicated among the plurality local area networks over a communication path  
3 comprising one or more wireless links.

1 32. The metropolitan area network according to claim 31 wherein each of the  
2 plurality of routers selectively alters the format for transmitting the data by selectively  
3 activating one or more techniques from a group consisting of: altering a bit rate for  
4 transmitting the data; altering a modulation scheme for transmitting the data; altering error  
5 correction coding for transmitting the data; altering spectrum spreading for transmitting the  
6 data; altering a power level for transmitting the data; and altering the communication path  
7 for transmitting the data.

1 33. A method of communicating data between local area networks, the method  
2 comprising steps of:

- 3 a. establishing a communication path for a data transmission wherein the  
4 communication path includes one or more wireless communication links  
5 between pairs of the local area networks;
- 6 b. transmitting the data along the path;
- 7 c. monitoring a transmission quality of the one or more communication links;
- 8 d. comparing the monitored transmission quality to a predefined transmission  
9 quality; and
- 10 e. selectively activating a technique for altering a manner in which the data is  
11 transmitted based upon the comparison wherein the technique alters the  
12 communication path for transmitting the data.

1 34. The method according to claim 33 wherein the step of monitoring a  
2 transmission quality includes a step of monitoring a rate at which errors occur in the data.

1 35. The method according to claim 33 wherein the step of selectively activating  
2 includes a step of transmitting a command over the one or more wireless links.

1 36. The method according to claim 33 further comprising a step of monitoring  
2 an amount of data communicated over the one or more wireless links and wherein the step  
3 of selectively activating is performed based also upon the amount of data communicated.

1 37. The method according to claim 33 wherein the technique alters a data  
2 transmission rate.

1 38. The method according to claim 33 wherein the technique alters error  
2 correction coding for transmitting the data.

1 39. The method according to claim 33 wherein the technique alters spectrum  
2 spreading for transmitting the data.

1 40. The method according to claim 33 wherein the technique alters a power  
2 level for transmitting the data.

1 41. The method according to claim 33 wherein the data is communicated  
2 between Ethernet-based LAN's or MAN's.

1 42. The method according to claim 33 further comprising steps of:  
2 a. monitoring a received signal strength;  
3 b. comparing the received signal strength to an expected level; and  
4 c. selectively adjusting a power level for transmitting the data based upon the  
5 comparison.

- 1     **44.**     The method according to claim 33 further comprising steps of:
- 2         a.     monitoring a received signal strength;
- 3         b.     comparing the received signal strength to a range of predefined strengths;
- 4         and
- 5         c.     selectively adjusting a power level for transmitting the data based upon the
- 6         comparison wherein the power level for transmitting the data is controlled
- 7         in a hysteresis manner.

## STATEMENT UNDER ARTICLE 19

Applicant's invention alters a technique for communicating data based upon monitored transmission quality. [Specification, page 3, line 8 - page 4, line 14] Claims 1 and 16 are amended to recite that the technique alters a modulation scheme for transmitting the data. None of the cited references teaches or suggests altering the modulation scheme based on monitored transmission quality. Accordingly, claims 1 and 16, and dependent claims 2-5, 7-15, 17, and 19-23, are novel and involve an inventive step.

Dependent claims 9 and 13-14 recite adjusting a power level for transmitting data. In combination with altering the modulation scheme, this feature provides an additional and unexpected benefit. Particularly, the effects of signal distortion can be lessened by altering the modulation scheme, which permits use of higher power. Dependent claims 10 and 21 recite altering a path for communicating the data. This feature is not taught or suggested by the references and provides a further benefit of routing data around links subjected to high traffic and rain fade. [Specification, page 4, lines 8-14] These are additional reasons why claims 9-10, 13-14 and 21 are allowable.

Applicant's invention includes a network of stationary nodes in a metropolitan area in which communications are along defined links between the nodes. [Specification, Figs. 1 and 2A-F] Because the nodes are stationary and the links defined, directional antennas are preferable to reduce interference and maximize distance. [Specification, page 10, lines 3-4] Accordingly, claim 27 is amended to recite directional antennas in addition to pre-existing limitations directed toward routers which route data to another router when an associated LAN is not a destination for the data.

In contrast to the stationary nodes of Applicant's invention, WO 94 27382 teaches a network of roaming devices and creation of spontaneous LANs. [WO 94 27382, page 11, lines 3-6; page 21, lines 12-27; page 23, lines 7-10] Because the devices are mobile, non-directional antennas are required. To prevent conflicts, a reservation access protocol is used. [WO 94 27382, page 25, lines 14-18] There is no suggestion to modify WO 94 27382 to include a directional antenna as this would defeat device mobility and spontaneous LANs, which are clearly objects of WO 94 27382.

GB 2 306 278 teaches a repeater station which communicates with fixed and mobile slave stations. [Abstract of GB 2 306 278] Clearly, a multiple-access protocol is contemplated. Accordingly, GB 2 306 278 also requires a non-directional antenna for

mobility of the slave stations and to implement multiple-access. US 5,220,678 teaches adjusting transmission power for voice calls to conserve battery power in hand-held, portable devices. [Abstract of US 5,220,678; col. 2, lines 26-29] Accordingly, US 5,220,678 cannot suggest a directional antenna because this would require that the devices be stationary. Stationary devices, however, would not be portable nor depend upon battery power. Therefore, the principle objects of US 5,220,678 would be absent.

Further, none of these cited references teaches or suggests a router as recited by claim 27. Therefore, amended claim 27, which recites directional antennas and routers, is novel and involves an inventive step. Dependent claims 28-32 are also allowable.

New claim 33 recites altering a path for communicating the data based upon monitored transmission quality. As explained above, none of the cited references teaches or suggests this feature. Accordingly, claim 33, and its dependent claims 34-44, are novel and involve an inventive step.

This Page Blank (uspto)



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPIC)**